



Flake System

Description and uses

The Acrylicon Flake System is 2-3mm thick and encapsulates decorative flakes within its chemically bonded monolithic structure. The system is designed for heavy traffic and moderate industrial use, combining unparalleled longevity with great aesthetics and is available in a multitude of colours. By using our exclusive blend of colour flakes, we are able to provide granite or marble style floors in a fraction of the time normally associated with the traditional systems.

Designed for heavy foot traffic and medium industry, for example, supermarkets, shopping centres, retail, hospitals, stadiums, schools, mass-transit, bathrooms and other areas where aesthetics, durability and cleanability are paramount.

Specification

Product	Acrylicon Flake System - Preparatory work and application in accordance with suppliers instructions.
Finish	Satin
Thickness	2-3 mm
Slip Resistance	For added slip resistance our Flake Plus option is available in different grades.
Colour	A wide range of options are available, consult the AcryliCon Flakes colour chart for details.
Supplier	AcryliCon Polymers GmbH (Germany).

Key features and benefits



High compressive strength - excellent durability and cleanability.



1-2 hours cure time - rapid installation and minimum downtime.



Decorative Finish - great aesthetics, UV stable and available in a wide range of colours.



Slip resistant - our floors exceed minimum safety requirements and can be tailored to each area.



Chemical bond/cure - a truly seamless floor with no cold joints and virtually no risk of delamination.



Low emissions - our products are solvent-free and contain very low VOC's.




Long lasting - our floors do not degrade, become brittle or porous with use.

To find your nearest AcryliCon office please visit our website:

www.acryliconpolymers.com

System

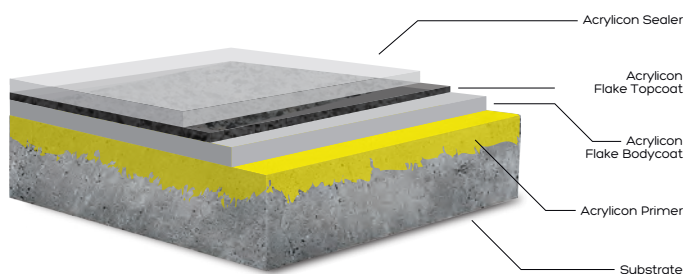

Technical Information

Compressive Strength
EN196-1 (DIN1164) 84 N/mm² / 12,183 psi

Flexural Strength
EN 196-1 (DIN1164) 30 N/mm² / 4,350 psi

Water Permeability
DIN / EN 1062-3:2008 <0.001 kg/(m².h^{0.5})

Tensile Adhesion
Strength DIN / EN 1542:1999 Concrete: >2.0 MPa

Slip Resistance
DIN 51130 (German Ramp Method) Dry R9 - R13 classification

Slip Resistance
BS 7976 (TRL Pendulum Test) Dry: 68
Wet: 61

Temperature
Resistance Tolerant of sustained temperatures up to 60°C/140°F

Abrasion Resistance
EN ISO 5470-1 (Tabar) <1000 mg (average mass loss)

Chemical
Resistance EN13529 Excellent

Fire Class
EN 13501-1 Efl - s1 (standard)
Cfl - s1 (slip resistant)

The technical properties of the AcryliCon system are evaluated to EN or ISO standards and the results are average values, delivered under proper installation procedures and recommended conditions.

Cleaning and Maintenance

Clean regularly using a mechanical Scrubber/Dryer. Cylindrical machines with built in a vacuum are best suited in combination with a neutral degreaser. Contact your nearest AcryliCon office for advice.

CureTime

The Flake System is fully cured within 2 hours after installation and may be put into full use by the customer.

Properties and Application

AcryliCon Primer, AcryliCon Bodycoat 1061 SW and AcryliCon Flake Topcoat are transparent, solvent-free, medium viscosity and non-toxic when cured. AcryliCon Flake System Bodycoat is a slightly elasticised resin into which coloured decorative flakes can be fully or partially broadcast. AcryliCon Flake Topcoat is used as a colourless top coat. AcryliCon Sealer is then used as a wear resistant sealer. The curing time is about 1 hour at 20°C/68°F (ambient). The lowest application temperature (substrate and material) is 0°C/41°F. AcryliCon can sometimes provide solutions for installations at temperatures down to -25°C /-13°F.

Substrate

The concrete strength must not be less than 22.5N/mm² (3250psi). Cores may be required for laboratory testing if any doubt exists. The substrate must be solid, free of dirt, oil, dust and other contaminants that would prevent bonding. It is necessary to protect the substrate from rising moisture and ground water pressure. AcryliCon systems can be applied onto 28 day old concrete at a Relative Humidity of up to 95%. Should there be any doubt about the moisture in the concrete, an insulated hygrometer is recommended for testing the vapour leaving the substrate. In situations requiring rapid installation, AcryliCon can provide fast cure systems as alternatives to traditional concrete. AcryliCon systems can also bond to other substrates. For further advice please contact your nearest AcryliCon office.

Life Expectancy

In excess of 20 years, subject to correct installation conditions and substrate preparation. Life expectancy is generally influenced by the use of the system and maintenance regime.

Disclaimer

This information and all further technical advice is based on intensive research and many years experience. However, it implies no liability or other legal responsibility on our part, including with regard to existing third party intellectual property rights, especially patent rights. We reserve the right to make technical alterations during the course of further development. The customer is not released from the obligation of checking our data and recommendations for the suitability of their own particular application. Performance of the product described herein should be verified by testing, which we recommend be carried out only by qualified experts and is the sole responsibility of the customer.



This product has been manufactured under the controls established by a Bureau Veritas Certification approved management system that conforms with EN 1504-2, ISO 9001:2015 and ISO 14001:2015.

To find your nearest AcryliCon office please visit our website:

www.acryliconpolymers.com

 **ACRYLICON**[®]
Quality Resin Solutions